

GRAND CRU SOLITAIRE SC – CEILING LIGHT

**WIRELESS CEILING LIGHT WITH A HIGH-POWER LED MODULE AND SOLID GLASS DIFFUSER
MADE OF MINERAL GLASS**

The light fixture can be mounted as a single object or as a cluster using standard, individual or bespoke ceiling brackets. Using the standard ceiling bracket the glass body is mounted directly below the ceiling with a 5 mm shadow gap.

Technical specifications

Voltage	24 V DC (CV)	Colour temperature	2,000–2,700 K
Power	approx. 7 Watts	Weight	approx. 1.6 kg
Luminous flux / efficiency	350 lm / 50 lm/W	Dimensions (L x W x H)	approx. 205 x 94 x 35 mm

LED modules with various colour temperatures control the colour of the glass (among other things): "Warm white LED": 2,700 K, > 90 Ra; "Amber LED": 2,400 K, > 80 Ra; "Tuneable white LED": 2,000–2,700 K (adjustable colour temperature), 7–5 Watts, > 80–>90 Ra. Lifespan of the LED module: approx. 40,000 hours; can be replaced by electrician. The glass bodies are also available in the colours Amethyst, Mandarin Garnet, Peridot, Sapphire, Tourmalin, Turquoise, Citrin, Smoky Quartz, Amber und Rose Quartz.

Control technology


The light fixture is dimmable with interface for trailing edge, 1–10 V, pushdim, remote control, or DALI. Dimmer / power supply units have to be installed externally. Switches / controllers to be provided by the customer.

Ceiling bracket

DB OSC surface-mounted.

Material

Please select your preferred surface finish for the socket in the "Material" section of our website.

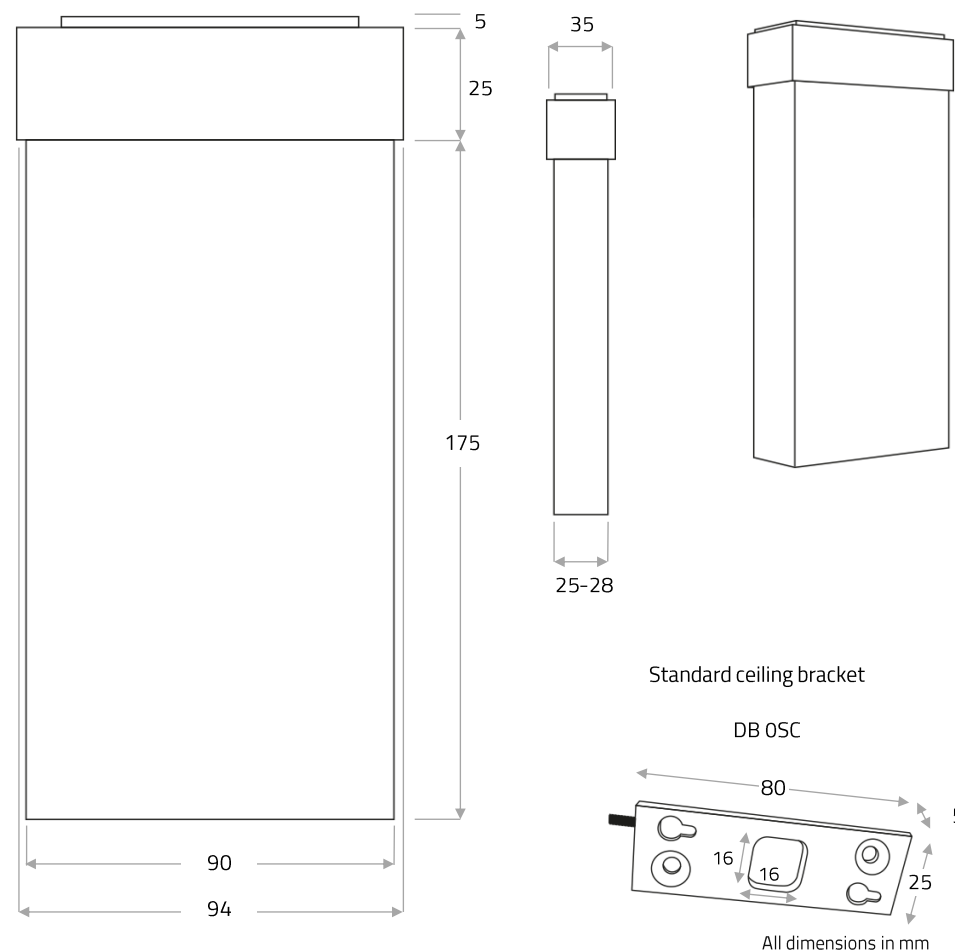

MASSIFCENTRAL

LCB Manufactur GmbH, Mommsenstr. 65, D-10629 Berlin
Phone +49 30 91 44 75 62, info@massifcentral.de, www.massifcentral.de

