# **GRAND PAPILLON - WALL SCONCE**

### WALL SCONCE WITH A SOLID GLASS BODY

These functional wall fixtures are ideal for bathrooms, corridors, mirror lighting and everywhere else where functional decorative lighting is required.

The ege of the glass is satinated to create a homogeneous light surface that beams onto the wall.

## **Technical specifications**

Voltage	24 V DC (CV)
Power	approx. 7 Watts
Luminous flux / efficiency	350 lm / 50 lm/W

Colour temperature	2,000-2,700 K
Weight	approx. 2.3 kg
Dimensions (L x W x H)	approx. 222 x 98 x 75 mm

LED modules with various colour temperatures:

Lifespan of the LED module: approx. 40,000 hours; can be replaced by electrician.


## Control technology


The light fixture is dimmable with interface for trailing edge, 1–10 V, pushdim, or DALI. Trailing edge can be installed integrated. All other power supplies must be fitted remote / externally. No integrated power supply if tuneable white. Switches / controllers to be provided by the customer.

With integrated power supply protection class IP20, with external power supply protection class is IP44.

### Material

Please select your preferred surface finish for the socket in the "Material" section of our website.

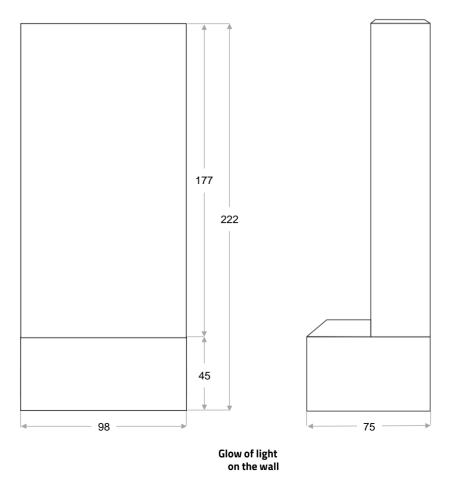



All dimensions in mm

LCB Manufactur GmbH, Mommsenstr. 65, D-10629 Berlin Phone +49 30 91 44 75 62, info@massifcentral.de, www.massifcentral.de



<sup>&</sup>quot;Warm white LED": 2,700 K, > 90 Ra: "Amber LED": 2,400 K, > 80 Ra:

<sup>&</sup>quot;Tuneable white LED": 2,000-2,700 K (adjustable colour temperature), > 80->90 Ra.