ALLUMETTE - CEILING LIGHT

CEILING LIGHT MADE FROM A RECTANGLE BAR WITH A HIGH-POWER LED MODULE AND AN UNINTERUPTED SOLID GLASS DIFFUSER MADE OF MINERAL GLASS

The ALLUMETTE is a modifiable light module which enables diverse planning options. The light fixture made from rectangular bars can be fitted either with one or two glasses. Can be installed both as an individual luminaire or as a luminaire cluster.

Technical specifications

Voltage	24 V DC
Power	approx. 10 Watts
Luminous flux / efficiency	700 lm / 70 lm/W

Colour temperature	2,000-3,000 K
Weight	approx. 5 kg
Dimensions (L x W x H)	230 x 235 x 100

LED modules with various colour temperatures:

"Warm white LED": 2.500 K, > 90 Ra: "Amber LED": 2.000 K, > 80 Ra:

"Tuneable white LED": 2,000-3,000 K (adjustable colour temperature), > 80->90 Ra.

Lifespan of the LED module: approx. 40,000 hours; can be replaced by electrician.

Control technology


The light fixture is dimmable with interface for phase cut (trailing edge) dimming, 1–10 V, pushdim, remote control, DALI, or CASAMBI. Dimmer / power supply units have to be installed externally. Switches / controllers to be provided by the customer.

Ceiling bracket / cable


Customized ceiling bracket on request.

Material

Please select your preferred surface finish for the socket and ceiling bracket in the "Material" section of our website.

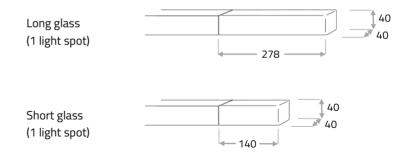

Element with 2 long glasses (2 light spots)



Element with 2 short glasses 2 light spots)



Example luminaire

4 horizontal elements with

2 long glasses each and

4 vertical elements with

1 short glass each

(12 light spots in total)



All dimensions in mm

