GRAND PAPILLON - WALL SCONCE

WALL SCONCE WITH A SOLID GLASS BODY

These functional wall fixtures are ideal for bathrooms, corridors, mirror lighting and everywhere else where functional decorative lighting is required.

The ege of the glass is satinated to create a homogeneous light surface that beams onto the wall.

Technical specifications

Voltage	24 V DC (CV)		Colour temperature	2,000–2,700 K
Power	approx. 7 Watts		Weight	approx. 2.3 kg
Luminous flux / efficiency	350 lm / 50 lm/W	1 1	Dimensions (L x W x H)	approx. 222 x 98 x 75 mm

LED modules with various colour temperatures:

"Warm white LED": 2,700 K, > 90 Ra; "Amber LED": 2,400 K, > 80 Ra; "Tuneable white LED": 2,000–2,700 K (adjustable colour temperature), > 80–>90 Ra. Lifespan of the LED module: approx. 40,000 hours; can be replaced by electrician.


Control technology

The light fixture is dimmable with interface for phase cut (trailing edge) dimming, 1–10 V, pushdim, or DALI. Trailing edge can be installed integrated. All other power supplies must be fitted remote / externally. No integrated power supply if tuneable white. Switches / controllers to be provided by the customer.

With integrated power supply protection class IP20, with external power supply protection class is IP44.

Material

Please select your preferred surface finish for the socket in the "Material" section of our website.

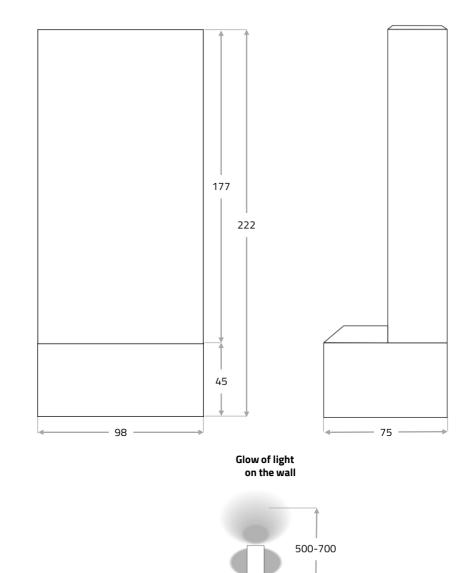

Made in Germany

All dimensions in mm

IP44

IP20

Massifcentral Manufactur GmbH, Eiswerderstr. 16, D-13585 Berlin

MASSIFCENTRAL Phone +49 30 33 30 80 30 00, info@massifcentral.de, www.massifcentral.de

© 2022, Massifcentral Manufactur GmbH. All rights reserved. The drawings and information contained herein may not be reproduced, communicated to the public or made available in whole or in part without prior permission. Patents issued and pending. All technical information in this document is subject to change.

🕻 🗲 🎡 🐵 RoHS 🕱