

# ALLUMETTE MUR DUO – WALL LIGHT

## WALL LIGHT WITH SOLID MINERAL GLASS DIFFUSERS

Classic proportions characterise this pole luminaire with 2 light spots. Particularly suitable for corridors and entrance areas and in principle as a multiple installation.

### Technical specifications

Voltage	24 V DC	Colour temperature	2,000–2,700 K
Power	approx. 14 Watts	Weight	approx. 5 kg
Luminous flux / efficiency	500 lm / 37 lm/W	Dimensions (L x W x H)	approx. 1500 x 40 x 75 mm

LED modules with various colour temperatures:

“Warm white LED”: 2,700 K, > 90 Ra; “Amber LED”: 2,400 K, > 80 Ra;

“Tuneable white LED”: 2,000–2,700 K (adjustable colour temperature), > 80–>90 Ra.


Lifespan of the LED module: approx. 40,000 hours; can be replaced by electrician.

### Control technology

The luminaire is dimmable with interface for phase dimming, 1-10 V, push-button, remote control or DALI. External power supply. Switches / controllers to be provided by the customer.

### Material

Please select your preferred surface finish for the socket and backplate in the “Material” section of our website.

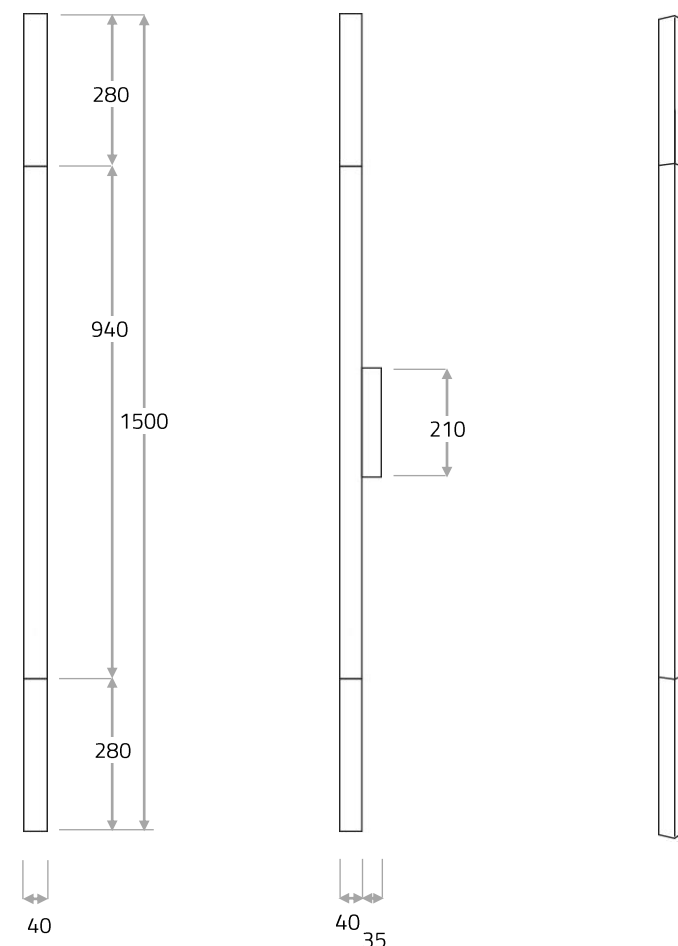

All dimensions in mm



MASSIFCENTRAL

Massifcentral Manufactur GmbH, Eiswerderstr. 16, D-13585 Berlin

Phone +49 (0)30 33 30 80 30 00, info@massifcentral.de, www.massifcentral.de



© 2023, Massifcentral Manufactur GmbH. All rights reserved. The drawings and information contained herein may not be reproduced, communicated to the public or made available in whole or in part without prior permission. Patents issued and pending. All technical information in this document is subject to change.