

# ALLUMETTE MUR – WALL LIGHT

## WALL LIGHT WITH SOLID MINERAL GLASS DIFFUSERS

Classic proportions characterise this pole luminaire. Particularly suitable for corridors and entrance areas and in principle as a pair installation.

### Technical specifications

Voltage	24 V DC	Colour temperature	2,000–2,700 K
Power	approx. 7 Watts	Weight	approx. 3 kg
Luminous flux / efficiency	250 lm / 37 lm/W	Dimensions (L x W x H)	approx. 455 x 40 x 70 mm

LED modules with various colour temperatures:

“Warm white LED”: 2,700 K, > 90 Ra; “Amber LED”: 2,400 K, > 80 Ra;

“Tuneable white LED”: 2,000–2,700 K (adjustable colour temperature), > 80–>90 Ra.


Lifespan of the LED module: approx. 40,000 hours; can be replaced by electrician.

### Control technology

The luminaire is dimmable with interface for phase dimming, 1-10 V, push-button, remote control or DALI. External power supply. Switches / controllers to be provided by the customer.

### Material

Please select your preferred surface finish for the socket and backplate in the “Material” section of our website.

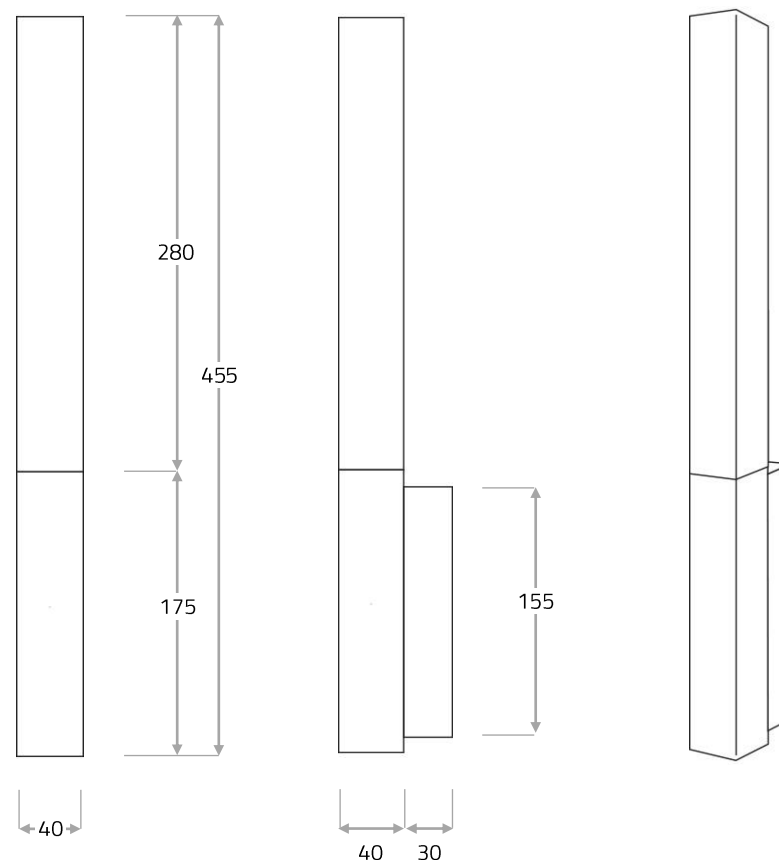

All dimensions in mm



MASSIFCENTRAL

Massifcentral Manufactur GmbH, Eiswerderstr. 16, D-13585 Berlin

Phone +49 (0)30 33 30 80 30 00, info@massifcentral.de, www.massifcentral.de

