

1 M COLONADES – PENDANT LIGHTS

1 METER (3 FEET) PENDANT LIGHT WITH 5 GRAND CRU PENDANT LIGHTS IN A ROW

5 GRAND CRU pendant lights in a row. Particularly well suited for bars, reception areas, kitchen islands, dining tables, mirrors in bathrooms or conference environments.

Technical specifications

Voltage	24 V DC (CV)	Colour temperature	2,000–2,700 K
Power	approx. 35 Watts	Weight	approx. 9 kg
Luminous flux / efficiency	1,650 lm / 50 lm/W	Dimensions (LxWxH)	approx. 1,000 x 150

LED modules with various colour temperatures control the colour of the glass (among other things):

“Warm white LED”: 2,700 K, > 90 Ra; “Amber LED”: 2,400 K, > 80 Ra;

“Tuneable white LED”: 2,000–2,700 K (adjustable colour temperature), approx. 50 Watts, > 80–>90 Ra.

Can be combined with glass colours: Amethyst, Mandarin Garnet, Peridot, Sapphire, Tourmalin, Turquoise, Citrin, Smoky Quartz, Amber und Rose Quartz.

Lifespan of the LED module: approx. 40,000 hours; can be replaced by electrician.

Control technology

The light fixture is dimmable with interface for trailing edge, 1–10 V, pushdim, remote control, or DALI.


Dimmer / power supplies can be installed internally or externally; switches / controllers to be provided by the customer.

Ceiling bracket / cable

Dimensions of ceiling mount: 1,000 x 150 mm, distance between each cable approx. 200 mm, canopy with 50 mm shadow gap. Usually wire-insulated, tin-plated tensile cable (diameter: 4.0 mm), standard cable length 2 m, individual cable length up to 20 m.

Material

Please select your preferred surface finish for the socket and ceiling bracket in the “Material” section of our website.

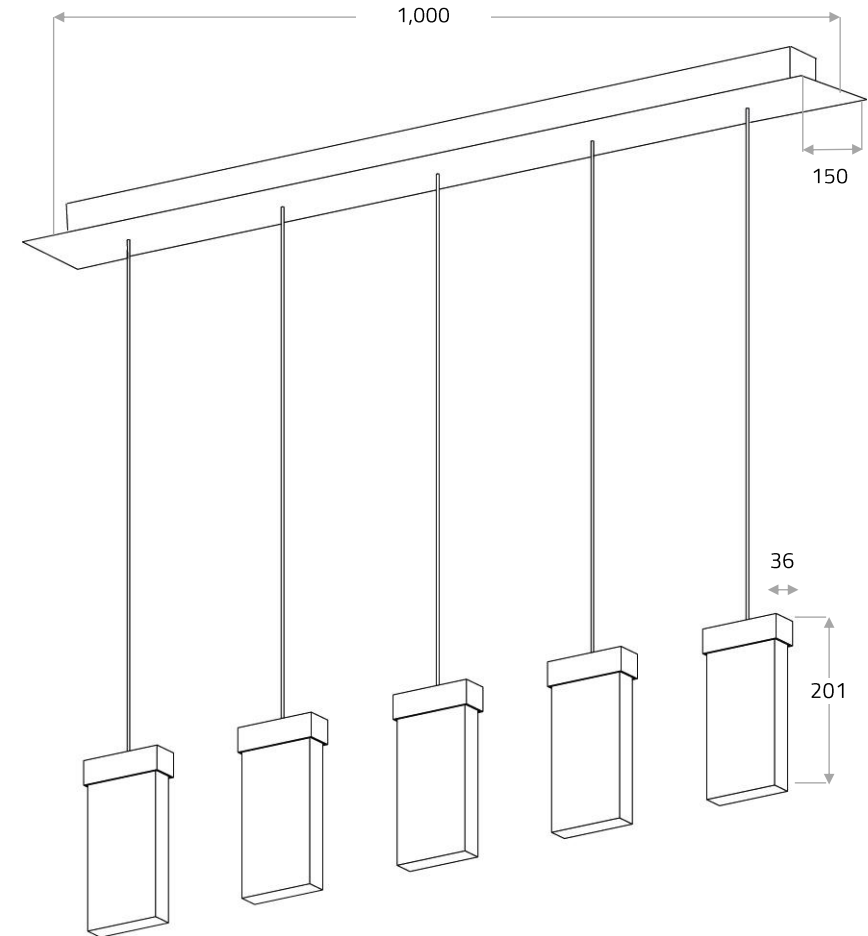

All dimensions in mm



MASSIFCENTRAL

LCB Manufactur GmbH, Mommsenstr. 65, D-10629 Berlin
Phone +49 30 91 44 75 62, info@massifcentral.de, www.massifcentral.de



© 2018, LCB Manufactur GmbH. All rights reserved. The drawings and information contained herein may not be reproduced, communicated to the public or made available in whole or in part without prior permission. Patents issued and pending. All technical information in this document is subject to change.